

CHEFTOP MIND Maps[™] PLUS







CHEFTOP MIND.Maps[™] PLUS Designed to fulfill your ambitions.

Controllable like your hand. Natural as your thoughts. Intelligent and connected. This is CHEFTOP MIND.Maps™ PLUS by UNOX, the professional oven that breaks down every barrier between your ideas and their achievement. With one gesture.



• Watch the "Touch of Brilliance" video on the official UNOX YouTube channel

Your success will speak volumes.







4

CHEFTOP MIND.Maps[™] PLUS The solution you need in whatever size you want.

The CHEFTOP MIND.Maps[™] PLUS ovens are the culmination of UNOX's years of research and experience of working alongside the most demanding chefs as they take on the daily challenge of making their creative ideas a reality.

They are designed to be easy to use and to guarantee top performance in all working conditions. They use the latest smart technologies to give real support in your work and to adapt to any kitchen, whatever the size.

The 3, 5, 7 and 10 GN 1\1 models and the 6 and 10 GN 2\1 models are the benchmark for every kitchen and, thanks to the possibility of creating stacked oven columns to meet your specific needs, they are perfect for every food service situation.

The freestanding 20 and 40 GN 1\1 and GN 2\1 roll-in trolley models are reliable workhorses that are perfectly suited to large scale banqueting and production kitchens.

The compact 5 and 10 grid GN $1\1$ and 5 grid GN $2\3$ models are the solution for kitchens where space is a key concern and where performance cannot be compromised. Perfect results, every time.



Unox Intelligent Performance Intelligent Cooking. Guaranteed results.


Achieving identical results for each load requires control, intelligence and expertise. Every detail counts: what happens before and during cooking, the various load quantities, food whose properties vary with the seasons and the unique manual techniques of each member of your team.

For example?

Cooking multiple trays requires more time than for just one or two: the door remains open for longer and the consequent drop in temperature is greater. The oven must begin cooking at a lower temperature and cook a higher quantity of food, for which more time is required to achieve the correct working conditions. In addition, the humidity emitted by the fully-loaded oven is greater than a partial load, and if the door is opened unexpectedly, it significantly alters all the parameters of the cooking process.

Achieving repeatable results requires continual supervision, monitoring of every detail and immediate intervention. In a few words: control, intelligence and expertise.

Exactly what CHEFTOP MIND.Maps[™] PLUS oven with UNOX INTELLIGENT.Performance provides.

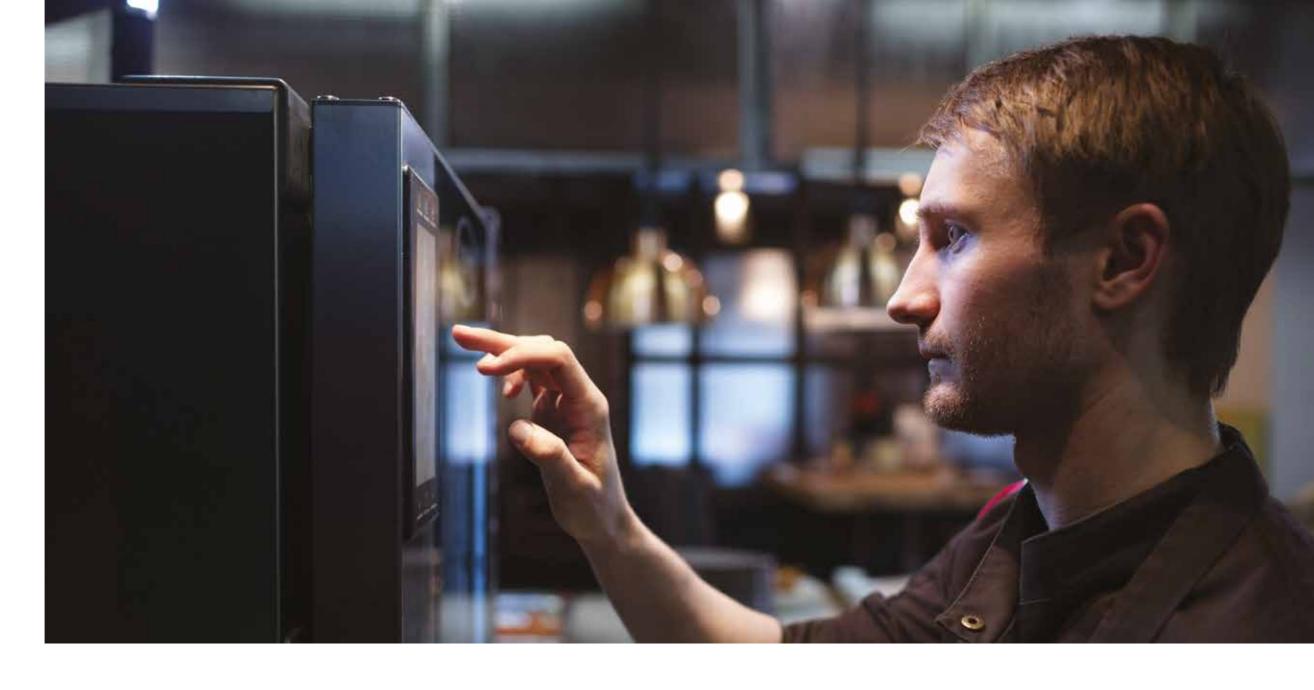

ADAPTIVE.Cooking[™] Perfect results. Every time.

The ADAPTIVE.Cooking[™] technology transforms your oven into an intelligent tool capable of interpreting your settings and understanding your desired result. Through its sensors and intelligence, your CHEFTOP MIND.Maps[™] PLUS registers changes in humidity and temperature. It effectively understands the quantity of food inserted into the oven to then automatically regulate the cooking process by acting on all the parameters and modulating the combined action of the INTENSIVE.Cooking[™] technologies, guaranteeing you an identical and perfect result every time. Exactly as you imagined.

CLIMALUX™ Total humidity control.

The actual humidity present inside the cooking chamber is the total of that produced by the oven and that generated by the evaporation of the water present in the food. Through CLIMALUX[™] intelligent technology, your CHEFTOP MIND.Maps[™] PLUS uses precise sensors to measure the effective humidity inside the oven and acts automatically when steam is emitted or humidity is extracted to ensure that the cooking conditions match the chosen settings. This is how CLIMALUX™ simultaneously guarantees repeatable cooking processes and water and energy savings even exceeding 90% when compared to traditional combination ovens.

AUTO.Soft Gentle cooking function.

A sharp increase in temperature in the presence of delicate products and in high oven load capacity conditions can compromise the uniformity of the overall result.

When the AUTO.Soft function is activated, your CHEFTOP MIND.Maps™ PLUS oven automatically regulates the rise in temperature according to what the sensors detect to make it gentler and guarantee an optimal distribution of heat inside each pan in the oven. Because every detail counts when your requirements take pride of place.

SMART.Preheating Intelligent preheating.

Correctly preheating the oven creates the ideal conditions to optimise cooking from the very first moments once the door is closed.

Your UNOX CHEFTOP MIND.Maps[™] PLUS is equipped with new SMART.Preheating intelligent technology that automatically sets the best temperature and preheating time according to the parameters of the chosen cooking process and to what has occurred in previous hours. As always, to guarantee you maximum repeatability of results at all times of the day and energy savings up to 20% compared to manual preheating.



SENSE.Klean Intelligent cleaning.

Your CHEFTOP MIND.Maps[™] PLUS oven is an intelligent piece of machinery equipped with technology that offers you maximum levels of cooking performance. Correct cleaning is essential to ensure that the sensors and components function correctly over time, therefore maintaining high levels of cooking performance day after day, month after month, year after year. SENSE.Klean[™] technology estimates the degree of dirt and suggests the best automatic cleaning mode according to actual use. To guarantee you maximum hygiene and avoid unnecessary waste of water and detergent.

Unox Intelligent Performance Maximum performance. **Guaranteed in all conditions.**

Intelligent technologies designed to maximize your work, improve performance, and help you achieve your ambitions of building success. Every single day.

Find out how UNOX INTELLIGENT.Performance technologies influence the cooking process, correct common mistakes and exponentially improve daily results. Perfection will become the norm.



WITHOUT ADAPTIVE. COOKING™ The quantity of food in the oven has an effect on the final result: a program set for a single tray will not be sufficient to cook the cooking chamber and a full load and, viceversa, a automatically optimises the program set for a full load time, temperature and climatic will overbake a singletray load.

WITH ADAPTIVE. COOKING™ ADAPTIVE.Cooking[™]

(-) 6 mins technology recognises the quantity of food in 240 °C 11 0% conditions.

SALMON

PRE 260 °C

OPTIMAL SETTINGS FOR A HALF LOAD

> WITHOUT ADAPTIVE. COOKING™ Cooking time: 6 minutes Actual average temperature: 250 °C Actual average level of humidity during the cooking program: 0%


RESULTS WITH A SINGLE TRAY


WITH ADAPTIVE. COOKING™ Cooking time: 6 minutes Actual average temperature: 240 °C Actual average level of humidity during the cooking program: 0%


RESULTS WITH A FULL LOAD

WITHOUT ADAPTIVE. COOKING™ Cooking time:

5 minutes Actual average temperature: 220 °C Actual average level of humidity during the cooking program: 50%

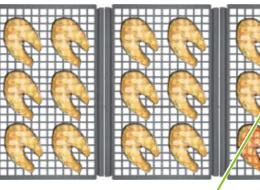

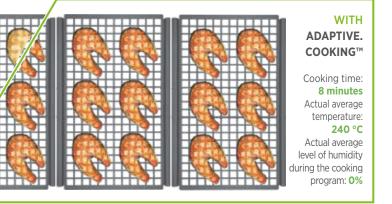

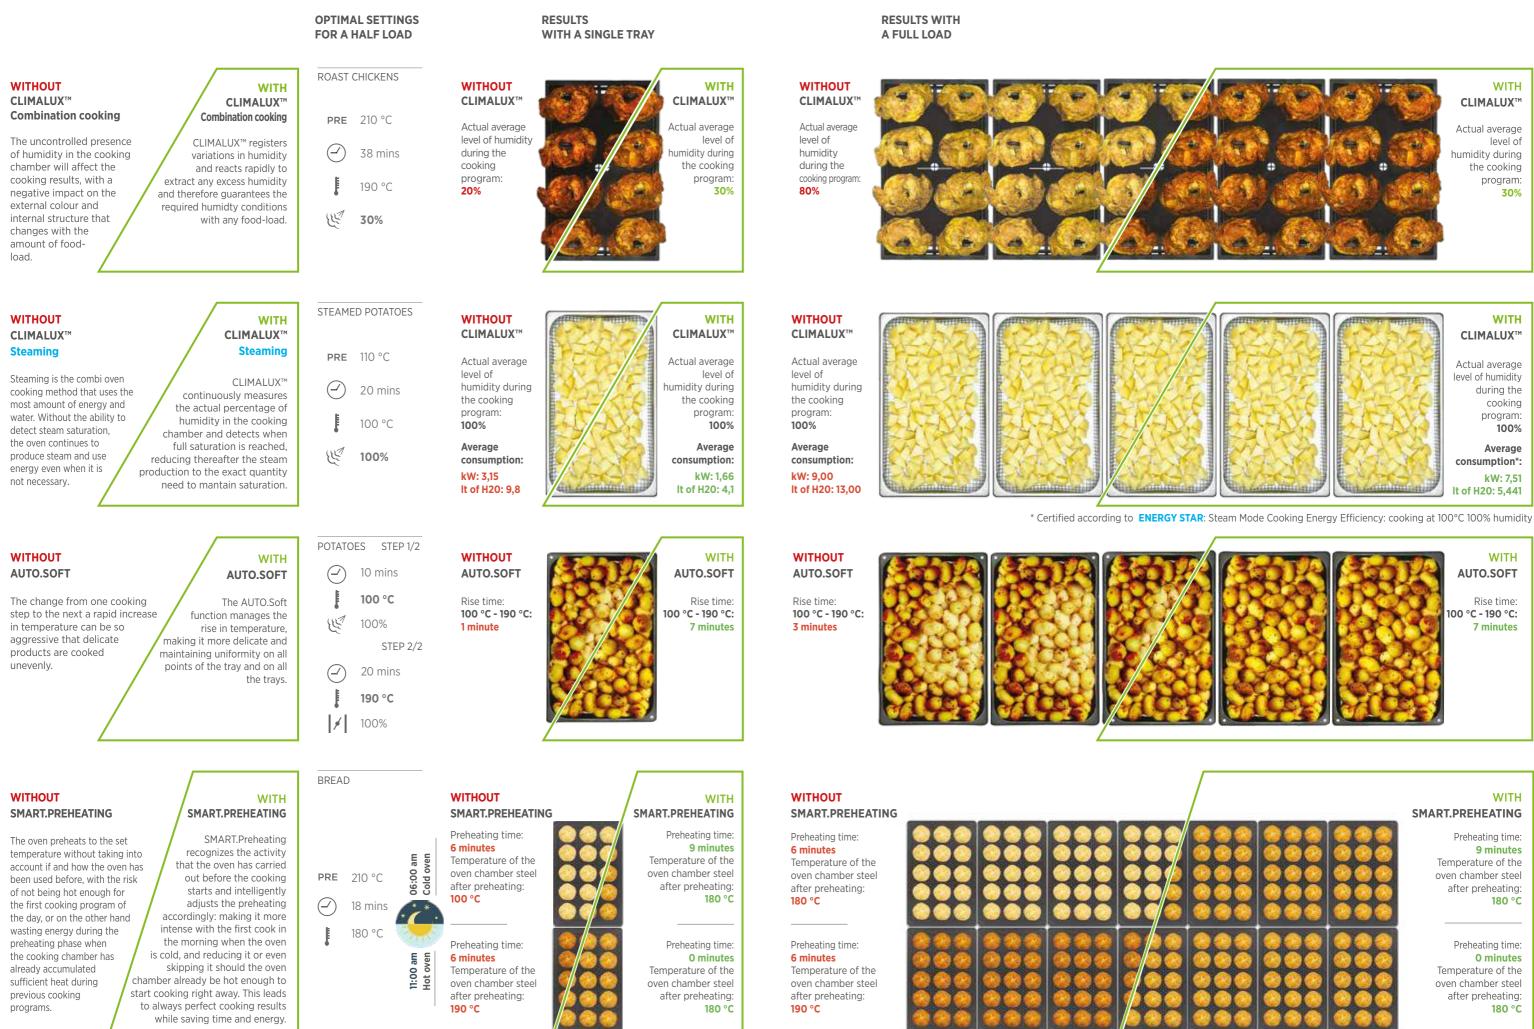

DDC - Data Driven Cooking

Your oven is unique, intelligent and connected.

The Data Driven Cooking artificial intelligence technology is designed to help you make the most of the potential of your UNOX CHEFTOP MIND.Maps[™] PLUS oven: it collects data, processes information, analyses the modes of use and gives you a daily report, and connects to the Internet cloud to identify and suggest recipes and personalised hints for your actual needs, which translate directly into new products for your clients.

With Data Driven Cooking, UNOX CHEFTOP MIND.Maps™ PLUS ovens become much more than a simple piece of kitchen equipment.

They become a true partner that contributes to the creation of your success.

Data Driven Cooking. Closer to you, closer to your success.

Innovation Award











DDC.Ai - Artificial Intelligence Your personalised virtual assistant.

When connected to the UNOX Cloud online, your CHEFTOP MIND.Maps[™] PLUS oven sends data to activate the DDC.Ai service, which uses artificial intelligence to process it in order to identity and suggest recipes and personalised hints for your actual needs, which you can immediately transform into new dishes for your menu. The results speak for themselves: after three months of activating the DDC.Ai service, the average use of the oven increases by 25%, and with that, so does the profitability of your investment.

DDC.Unox and DDC.App Everything just a click away.

With the ddc.unox.com Internet portal and DDC.UNOX App, you have control of your connected CHEFTOP MIND.Maps™ PLUS oven even when you are not in the kitchen. You can monitor its operating status in real time, collect and analyse usage and HACCP data from previous months, create recipes from your computer, receive those that DDC.Ai suggests and send them to your ovens with a simple click.

DDC.Stats Monitored for constant improvement.

Your CHEFTOP MIND.Maps[™] PLUS oven monitors and analyses energy, water and detergent consumption, registers cooking times and counts the minutes the door is open; the DDC.Stats function translates them into valuable, useful and clear information that is directly viewable on the control panel to genuinely help you identify every opportunity for improvement and eliminate any waste, hence increasing your daily profit.

Unox Intensive Cooking


You chose not to settle for less. Maximum cooking intensity.

Thanks to its technology, your CHEFTOP MIND.Maps[™] PLUS oven is the most efficient and evolved cooking instrument in your kitchen, capable of guaranteeing extremely high performance levels and noticeable savings in terms of time, energy and labour in each one of its applications.

Perfect cooking, uniformity in each pan inserted into the oven, saturated and dense steam in a few seconds or complete extraction of humidity, intense or gentle air flows. The combination oven taken to its maximum expression.

But that's not all: UNOX INTENSIVE.Cooking also allows you to use your CHEFTOP MIND.Maps[™] PLUS for cooking that is normally carried out with traditional equipment such as static or convection ovens.

The savings? It's substantial: up to 45% less energy compared to a traditional grill, over 60% less water compared to cooking in boiling water, up to 80% less oil compared to a fryer. And above all an assistant who continually monitors the cooking process without further labour costs.

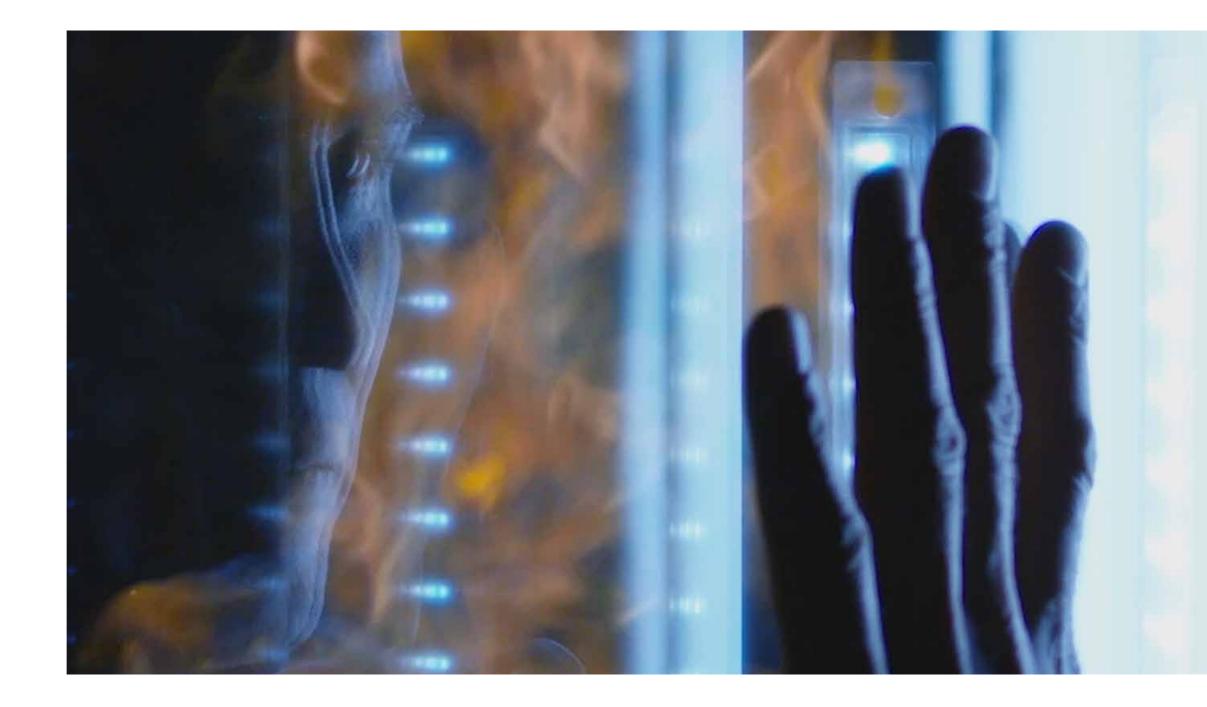

DRY.Maxi[™] Humidity gives way to flavour.

Humidity is extracted, removed, eliminated. In part or completely, you decide. Give your preparations perfect consistency, colour and crunchiness every time. Well defined and subtle flavours, never mixed together. Meat, fish and vegetables maintain their identity and enhance their characteristics even when cooked at the same time. DRY.Maxi[™] is the technology you'll never go without; the absence of humidity gives your more flavourful preparations even greater concentration. Ending a cooking process with DRY.Maxi[™] will be like signing your masterpiece. Get used to doing great things.

STEAM.Maxi[™] The power of steam is in your hands.

The continuous and rigorous control and precise calculation of the humidity changes in the cooking chamber make STEAM.Maxi[™] your best ally in your cooking processes. From a hot dense cloud that envelops your food, to partial humidity. From 35 to 260 degrees. Everything you want. As you want it.

STEAM.Maxi[™] adapts to high cooking performance and at the same time guarantees energy and water savings thanks to the on-demand production of steam that is regulated by precise algorithms. Perfection. Density and Intensity.

AIR.Maxi[™]

Conducts, unites, transforms.

The high-flow multi-fan AIR.Maxi[™] system offers reliable results in every application. Powerful air flows capable of pushing heat into the depth of food, shortening cooking times for meat, fish and vegetables, grilled, fried or roast food, but which also provide controlled and gentle ventilation for gentle cooking, dehydration, delicate browning and overnight cooking.

AIR.Maxi[™] technology guarantees the best uniformity of cooking in every load condition for every kind of food thanks to the rotation reversals that occur according to the load and food type. Choose not to settle for less.

EFFICIENT.Power[™] Power and efficiency.

High-efficiency heating elements or SPIDO.GAS[™] forced air burners system with patented symmetrical heat exchangers: whichever power source you choose for your CHEFTOP MIND.Maps[™] PLUS, you're always guaranteed maximum performance and efficiency. Maximum speed of temperature rise and precisely maintaining it, energy savings ensured by the triple-glazed door and high performance insulating materials. In figures? From 60 to 260°C in 300 seconds in both electric and gas models. Category leading efficiency in combi mode, dry air and steam according to ENERGY STAR certification.

PLUS control panel The pleasure of being in full control

Innovative yet simple - its the new frontier of communication between you and your oven.

The control panel of your CHEFTOP MIND.Maps[™] PLUS is the result of combining revolutionary ideas with ease of use.

With its 9.5 inch touch screen, the CHEFTOP MIND.Maps[™] PLUS control panel gives you maximum possibility of choice: create your own program, use one of the many automatic cooking programs available and manage up to 10 timers simultaneously. The choice is yours. CHEFTOP MIND.Maps[™] PLUS will always be ready.





SET Simple. Comprehensive. Intuitive.

The freedom to create any cooking program, in a clear and intuitive way. All of your parameters appear on one screen. You can set hours, minutes and seconds, or choose infinity cooking mode or even an overnight program.


Choose the temperature you want, choose the climatic conditions and the fan speed. Create up to 9 steps in your cooking program, to cook anything that you want, exactly as you want it.



PROGRAMS Your masterpieces. Today, tomorrow, forever.

All of your creations are unique and repeatable thanks to your personal recipe book which allows you to save and organise your cooking programs.

CHEFTOP MIND.Maps[™] PLUS allows you to save over 380 programs and to organise them into 16 different groups, so you can group your recipes according to who will use them or according to type of food, such as meat, fish, vegetables and deserts. it will become an invaluable tool in your kitchen.



MIND.Maps[™] Don't select a cooking program, draw your own.

Add your Touch of Brilliance. Freely, whenever you want. Make your creativity repeatable. The MIND.Maps[™] visual language technology allows the most elaborate cooking processes to be created by hand on the control panel. With the pen set in the handle of your CHEFTOP MIND.Maps™ PLUS you can draw even the most complex cooking processes with the utmost creative freedom and then repeat them whenever you want. You create, the oven works.



CHEFUNOX Choose what you want to cook. Start. That's it.

Imagine you have full use of a library of cooking programs calibrated to achieve the best results with zero waste of time and raw material. Choose the cooking method, select the food category, set the degree of cooking required and your CHEFTOP MIND.Maps[™] PLUS oven will do the rest. CHEF.UNOX is the answer to the demand for high and repeatable quality standards. In every situation.

MULTI.Time Multitasking dreamed of.

The frenzy of service at peak times, shouting out orders, pressure, heat, tension.

The need to manage everything in the shortest time possible. Orderly and organised. This is the moment in which MULTI.Time technology comes into play, giving you the possibility of managing up to 10 cooking processes at the same time and always having maximum control at a glance.

you've always



MISE.EN.PLACE

We've gone further than kitchen organisation.

The incredible possible. With MISE. EN.PLACE, vour CHEFTOP MIND.Maps™ PLUS oven acquires even more value and intelligence.

Thanks to a unique and intuitive function, it recommends the correct order and times to insert each pan into the cooking chamber so that all your products are ready at the same time.

Being on time has never been so simple.

Every detail counts. And you know it. Designed and built for perfection.



TRIPLE GLASS - ENERGY STAR CERTIFIED



MULTI.POINT CORE PROBE



4 SPEED MULTIPLE FAN SYSTEM



HIGH PERFORMANCE INSULATION MATERIAL



STAINLESS STEEL AISI 304 COOKING CHAMBER



9.5" LCD TOUCH SCREEN CONTROL PANEL



LED CHAMBER ILLUMINATION INTEGRATED IN THE DOOR



3G/WIFI CONNECTION CONFIGURATION



EXTRA FINE SOUS VIDE CORE PROBE - OPTIONAL




DOOR DOCKING POSITIONS AT 60°/120°/180°

The products manufactured by UNOX are protected by one or more of the following patents or patent applications: IT 1393731; US 8071917; DE 10160225.8E5 2369245; DE 102011010245.0; IT 1398088; US 8.712.561; DE 102011010753.3; IT 1398091; DE 10201010469.5; IT 1399068; US 88712.561; DE 102011014413; IT 1398861; US 8662066; IT 402074; DE 602006001437; ES 2308664; IT 502008901655862; DE 102007060439.6; ES 2340454; IT 1412358; IT 1427160; IT 142779; DE 102015114648; US 4459590; DE 102015114648; IT 1428030; IT 283033; ES 1157660; IT 20201500000785; US 15050960; DE 202016100941; IT 202015000009810; IT 2020150000018; IT 1020150000018; IT 10201



ANTI TIP TRAY SUPPORTS

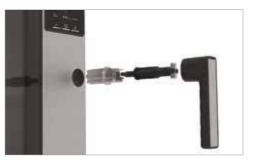

CARBON FIBRE DOOR HANDLE



USB PORT FOR UPLOAD/DOWNLOAD OF DATA



FORCED AIR BURNERS WITH SYMMETRICAL HEAT EXCHANGERS



ANTI CONDENSATE DRIP TRAY



Rotor.KLEAN[™] AUTOMATIC WASHING



HIGH PERFORMANCE HEATING ELEMENTS



SMART CLOSURE FOR TROLLEY OVENS



INTEGRATED DET&RINSE TANK



PERFORATED LATERAL SUPPORTS

ACCESSORIES

Certified ventless hood.



The UNOX steam condensing hood is an ideal solution for installing your CHEFTOP MIND.Maps[™] PLUS oven in any point of your kitchen.

Within the hood a self-cleaning filter removes odours and latent heat from the fumes that are expelled through the oven chimney, without the need for maintenance or cleaning work on the filter. If food that is particularly rich in fat is cooked often, it is possible to install an activated carbon filter kit to further reduce odours, even when the door is opened.

Choosing a UNOX ventless hood is an investment that will save you money.

It allows you to install your CHEFTOP MIND.Maps[™] PLUS even without* a ceiling canopy, or to prefilter the fumes and reduce maintenance on the centralised extraction system.



 $\ensuremath{^*\text{subject}}$ to inspection and approval by organisations and to local regulations.

INTEGRATED EXTRACTION SYSTEMS Fresh kitchen air.


Cook and hold oven in a single unit.



Low temperature cooking, slow braising, slow roasts, sous vide cooking, regeneration, holding, night cooking. Just some of the countless cooking techniques SLOWTOP Cook'n'Hold offers.


This cook and hold oven is able to cook up to 180°C, allowing you to do much more than simply hold the temperature, such as managing automatic overnight cooking, steam production and soft browning, and lightening the work load of the CHEFTOP MIND.Maps[™] PLUS oven during the day.

Thanks to its single-phase electrical power supply it ensures unbeatable performances with minimal consumption and is the perfect partner for your CHEFTOP MIND.Maps™ PLUS.

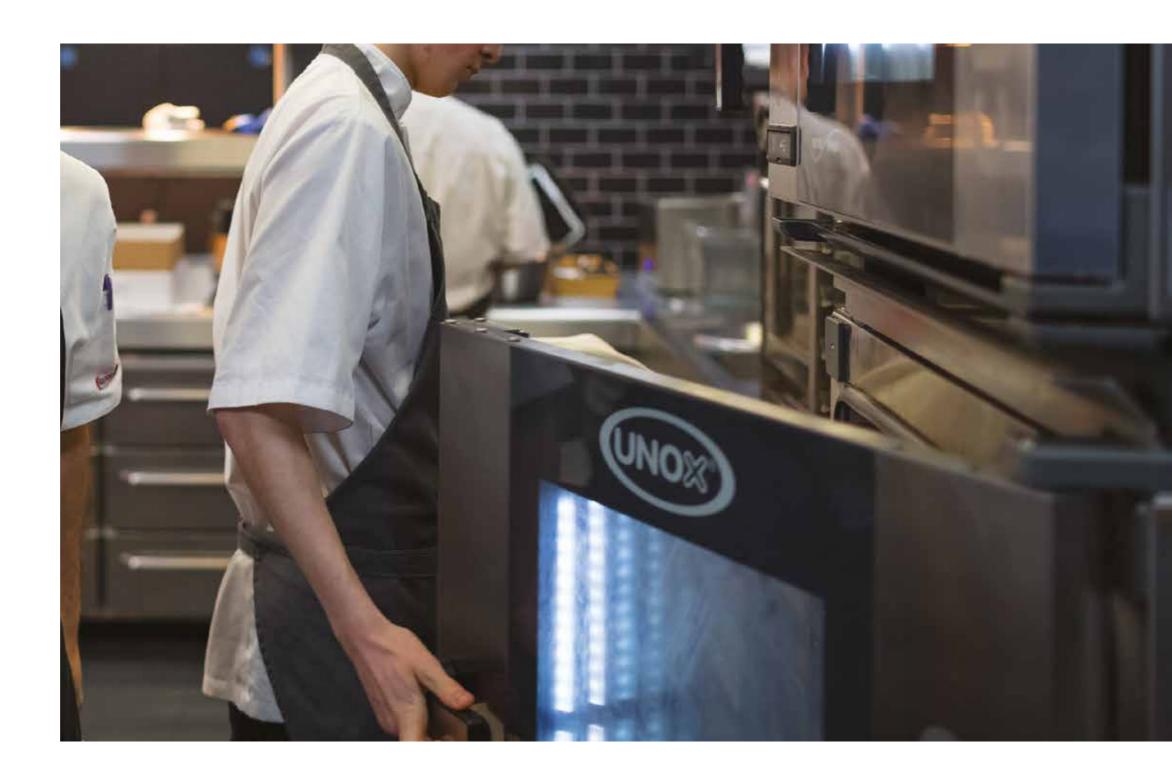

SLOWTOP COOK'N'HOLD. Even more than a simple holding cabinet.

HYPER.SMOKER Smoke. Cook. Amaze.

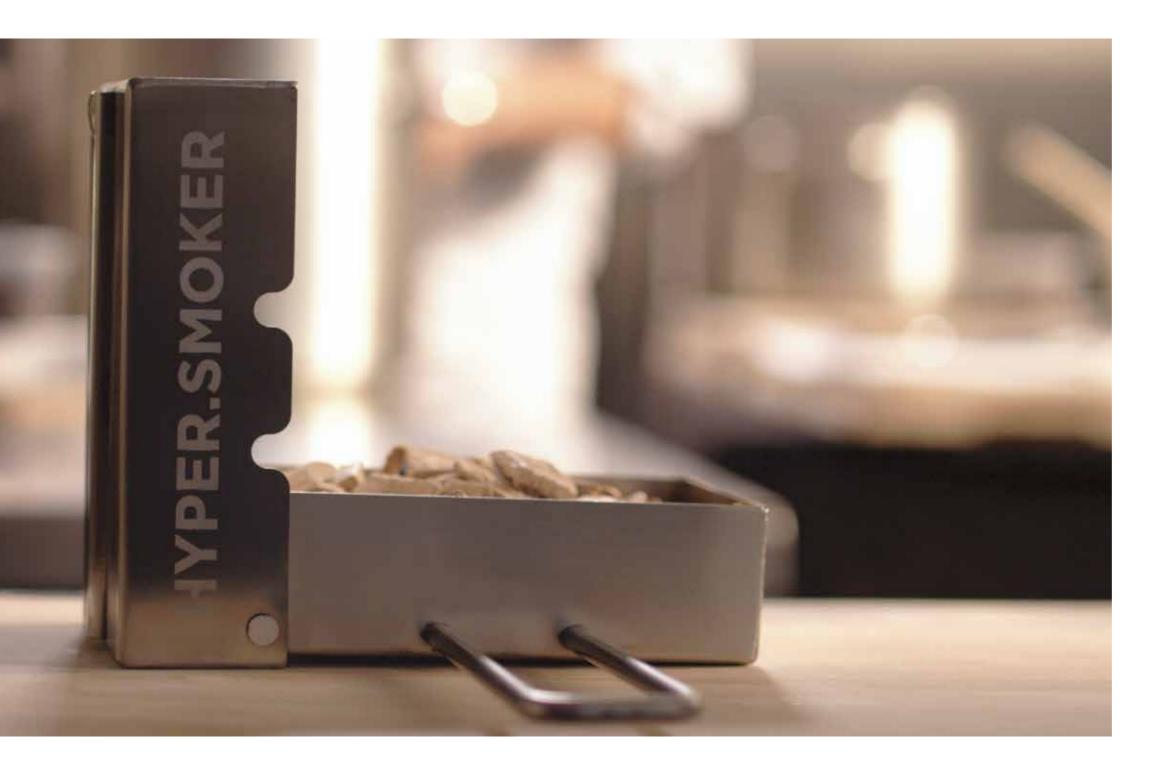

Enrich your dishes, amaze your guests. HYPER.Smoker, your small secret.

HYPER.Smoker by UNOX transforms your CHEFTOP MIND.Maps[™] PLUS into a smoker. You can use shavings of natural wood and choose from among 10 different smoking intensities directly from the control panel of the oven to amaze even the most demanding of palates, giving smoked undertones to your dishes.

Choosing HYPER.Smoker for your CHEFTOP MIND.Maps[™] PLUS will allow you to smoke food by using the energy produced in the cooking chamber without further costs and external electrical power supply.

The easiest process for the maximum flavour.



QUICK.Load & QUICK.Plate

Productivity and efficiency are the key to the success of production kitchens, banqueting rooms, hotels and large restaurants. Every second counts, every opening of the door is important. The oven has to continue its work without ever being interrupted.

The QUICK.Load rack system for CHEFTOP MIND.Maps™ allows you to cook large quantities of dishes in a very short time with minimal heat loss and the shortest time between one cooking process and the next.

For large banquets the QUICK.Plate racks allow you to regenerate up to 102 dishes in a few minutes, avoiding the formation of condensation thanks to the CLIMALUX continuous humidity control of your CHEFTOP MIND.Maps™ PLUS oven.

The HOLDING.Cover thermal cover allows you to keep them warm before serving.

HOLDING.Cover	CHIFTON	HOLDING.Cover OPTIONAL.
QUICK.Load 20 trays GN 2/1 20 trays GN 1/1 HOLDING.Cover	CHEFTOP MIND.Maps [™] PLUS 20 trays GN 2/1 20 trays GN 1/1	QUICK.Plate 102 plates (GN 2/1) 51 plates (GN 1/1) HOLDING.Cover





 QUICK.Load
 CHEFTOP MIND.Ma

 for 10 tray GN 2/1 ovens
 neutral cabinet or

 for 6 tray GN 2/1 ovens
 high stand

for 9 tray GN 1/1 ovens for 7 tray GN 1/1 ovens



QUICK.LOAD & QUICK.PLATE Solutions for production kitchens and banqueting. Quality, quantity and speed are of the essence. ACCESSORIES






OPEN SOLUTION

- + SMART.Drain
- + High open stand

CLOSED SOLUTION

+ SMART.Drain

SMART.Drain. **Cooking fat and liquid** collection system




Several cooking processes that are typically carried out in supermarkets, production kitchens and steak houses such as grilling, frying and roasting full loads of pork, poultry and beef can create a large amount of fat. In this case it becomes very important to protect your drainage from the threat of possible blockage.

UNOX have developed SMART.Drain as a solution to this problem. SMART.Drain is a special two-way valve that collects any fat and cooking liquids created during the cooking program and drains them into a tank. For each one of your cooking programs, you can set the correct position of the valve directly on the control panel, which will be automatically monitored by your CHEFTOP MIND.Maps™ PLUS before the start of the cooking to avoid any risk of the drain being blocked by solidified collagen and grease released by the food during the cooking program, which could in turn cause serious damage to the kitchen/shop.



28

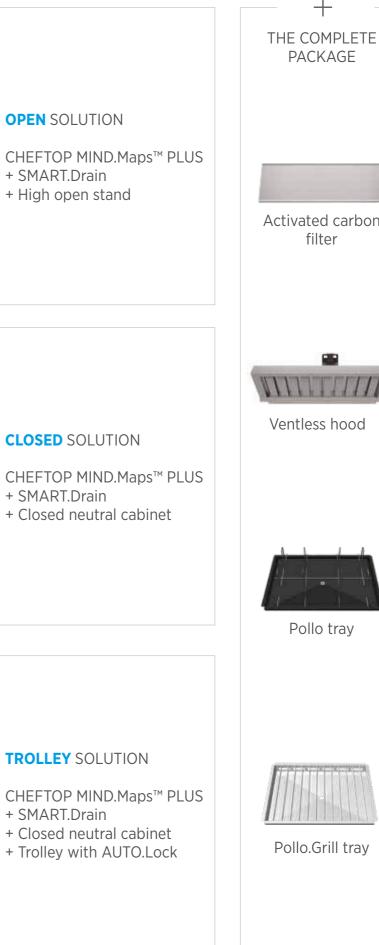

Activated carbon filter Ventless hood Pollo tray



Pollo.Grill tray

MAXI.LINK Not only time, but space is also money.

With MAXI.Link[™] you can create stacked oven and accessory columns in order to make the most of the vertical space and keep the footprint to a minimum. The advantages are clear in terms of flexibility and energy efficiency: you can carry out different cooking processes at the same time and only use the necessary ovens, avoiding waste. Two smaller ovens instead of one larger one, with the same total tray capacity, will allow a notable reduction in service time and therefore an increase in profits.

Not only time, but space is also money. MAXI.Link[™] allows you to save space, as it optimises every centimetre in your kitchen.



PRACTICALITY **Restaurant 40/60 covers**



5 TRAYS GN 1/1 COMPACT 5 TRAYS GN 1/1 COMPACT

PROFITABILITY Restaurant 60/100 covers





5 TRAYS GN 1/1 7 TRAYS GN 1/1

VERSATILITY Restaurant 100/200 covers



7 TRAYS GN 1/1 7 TRAYS GN 1/1

FLEXIBILITY **Butcher & Deli Shop**





7 TRAYS GN 1/1 SLOWTOP 7 TRAY GN 1/1

PRODUCTIVITY Hotel & Banqueting



6 TRAYS GN 2/1 6 TRAYS GN 2/1





RELIABILITY Marine



6 TRAYS 18"x26" - 600x400 - GN 2/1 6 TRAYS 18"x26" - 600x400 - GN 2/1

COOKING ESSENTIALS **Special trays.**

The collection of UNOX Cooking Essentials special trays transforms your CHEFTOP MIND.Maps[™] PLUS from an oven to a multifunctional cooking centre.

Each cooking operation requires a tray with precise characteristics to spread the heat in a specific way.

The special Cooking Essentials in fact enable you to steam, grill, fry, brown and roast, using the full potential of your CHEFTOP MIND.Maps[™] PLUS and impressing your guests.



FRYING

PAN.FRY

Enamel coated pan for frying breaded products.



IDEAL FOR:

• Croquettes

Breaded fish filets

• Breaded vegetables

Breaded cutlets

ADVANTAGES

- Reduces the amount of cooking grease and oil
- Uniform cooking on every point of the tray

BACON

Removable steel grid with a non-stick steel tray h40 to collect grease.



• Grill up to 18 slices of crispy bacon in 5 minutes


• Easy to clean thanks to the non-stick coating

ADVANTAGES

IDEAL FOR:

- Bacon Sausage
- Roast meat
- Spatchcock chicken

EGGX Non-stick steel tray for frying eggs.

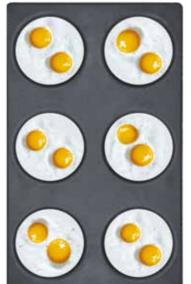

IDEAL FOR:

- Fried eggs
- Omlettes Pancakes
- Tortillas



ADVANTAGES

- Fry up to 12 eggs in less than 4 minutes
- Light, hard-wearing and easy to clean

STEAMING

STEAM&FRY

Stainless steel gird for steaming or regenrating pre-fried foods.



IDEAL FOR:

- Chips
- Pre-fried items
- Sous vide cooking
- Steamed vegetables

ADVANTAGES

- Battered vegetables ready in just 4 minutes
- Dual use: steaming and cooking pre-fried items

FORO.BLACK Non-stick perforated aluminium pan.



IDEAL FOR: Croissants

- Fresh bread
- Danish pastries Pastry

ADVANTAGES

• Baking parchment is not required

• Ultra low edge for maximum baking uniformity



1cm thick aluminium plate, flat on one side and

ADVANTAGES

FAKIRO[™]

- Pizza with a crisp base ready in just 4 minutes
- 13 mm thickness for stone baked effect

GRILLING

FAKIRO[™] GRILL

13mm non-stick aluminium plate for grilling. Must be preheated in the oven.



IDEAL FOR: • Grilled meat • Grilled fish

• Grilled vegetables

ADVANTAGES


• Grill up to 12 portions of meat in 5 minutes

• 13 mm thickness to hold the heat

GRILL

ADVANTAGES

Non-stick aluminium tray for grilling. Preheating of the tray is not required.

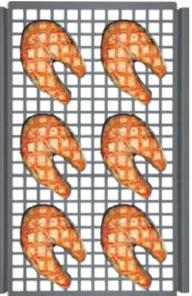

• Grill up to 18 filets of fish in 6 minutes

• Useful for batch grilling as preheating is not required

IDEAL FOR: • Grilled fish • Grilled vegetables

IDEAL FOR:

Foccacia

• Bread rolls

• Pizza

Bread

• Grilled meat

POLLO.BLACK

Non-stick tray with supports to roast full chickens and collect grease



IDEAL FOR: Roast chickens Steamed chickens

ADVANTAGES

- Vertical supports optimize air flow around each chicken for perfect results
- Fat is collected and drained towards the centre to avoid excess dirt in the chamber

BLACK.20

Non-stick stainless steel pan h 20mm



IDEAL FOR:

 Ratatouille Roast potatoes

Roast fish



ADVANTAGES • Roasting without any waste • Easy to clean

POLLO.GRILL

Steel grid with a fat collection tray for cooking spatchcock chickens, roast meat or fish.



IDEAL FOR:

- Roast meats
- Spatchcock chicken
- Roast fish

ADVANTAGES

- Uniform air flow around the product
- Fat collection in the tray to avoid excess dirt in the chamber

STIRING & BRAISING

BLACK.40

Non-stick stainless steel pan h 40mm



IDEAL FOR:

- Stews
- Lasagne
- Steamed rice
- Roast vegetables

ADVANTAGES

- Stewed or braised products with no wastage
- Easy to clean



UNOX.CARE PROGRAM Protect the performance you deserve.

DET&Rinse[™] is the detergent and rinse aid especially designed to ensure every day maximum hygiene levels, lower consumption rates and the durability of every component of your CHEFTOP MIND.Maps[™] PLUS oven with SENSE.Klean intelligent automatic washing.

You can choose between double concentration DET&Rinse[™] PLUS for harder to shift dirt or DET&Rinse[™] ECO for daily cleaning and maximum eco friendliness. Every bottle of DET&Rinse[™] has a hermetic safety seal which prevents the release of liquid until it has been correctly screwed into the built-in drawer of your CHEFTOP MIND.Maps[™] PLUS oven to ensure maximum peace of mind during loading operations.



DET&Rinse[™] PLUS Art.: DB 1015



DET&Rinse[™] ECO Art.: DB 1018

The UNOX.Pure filter and UNOX.Pure-RO reverse osmosis filtering systems reduce or eliminate completely from the water all the substances which contribute to the formation of lime scale and/or rust inside the cooking chamber, a known cause of malfunctioning and breakdown.

The control panel of your CHEFTOP MIND.Maps[™] PLUS oven also monitors the quantity of water filtered by the UNOX.Pure system and automatically signals when it is time to replace the filter, optimising its use. UNOX. Pure is recommended for soft or medium water or with concentrations of chlorides below 25 ppm, while UNOX. Pure-RO is recommended for areas with particularly hard water and/or high concentrations of chlorides or iron ions.



UNOX.Pure Art.: XHC003



UNOX.Pure-RO Art.: XHC002

A range of excellence.

	GN 2/1			GN 1/1
ELECTRIC	XEVC-2021-EPR	XEVC-1021-EPR	XEVC-0621-EPR	XEVC-2011-EPR
Capacity	20 GN 2/1	10 GN 2/1	6 GN 2/1	20 GN 1/1
Pitch	67 mm	77 mm	77 mm	67 mm
Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Voltage	400 V ~ 3N	400 V ~ 3N	400 V ~ 3N	400 V ~ 3N
Electrical power	51,3 kW	30,8 kW	20,5 kW	35 kW
Dimensions (WxDxH mm)	882x1207x1866	860x1120x1163	860x1120x843	882x1043x1866
Weight	200 kg	170 kg	160 kg	185 kg
GAS	XEVC-2021-GPR	XEVC-1021-GPR	XEVC-0621-GPR	XEVC-2011-GPR
Capacity	20 GN 2/1	10 GN 2/1	6 GN 2/1	20 GN 1/1
Pitch	67 mm	77 mm	77 mm	67 mm
Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Voltage	230 V ~ 1N	230 V ~ 1N	230 V ~ 1N	230 V ~ 1N
Electrical power	2,3 kW	1,4 kW	1 kW	2,2 kW
Max. gas rated power	G20: 68 kW/ G25, G25.1: 66 kW/ G30, G31: 70 kW	G20, G25, G25.1: 33 kW/ G30, G31: 35 kW	G20, G25.1, G31: 24 kW/ G25: 23 kW/ G30: 25 kW	G20, G30, G31: 34 kW / G25; G25.1: 33 kV
Dimensions (WxDxH mm)	882x1207x1866	860x1120x1163	860x1120x843	882x1043x1866
Weight	230 kg	190 kg	180 kg	210 kg



750x773x843

100 kg

750x773x675

85 kg

750x773x1010

110 kg

Note:

Door opening from left to right: example of code XEVC-2021-EPL (L= left) (R= right)

FEATURES • Standard • Optional - Not available	ELECTRIC	() GAS
MANUAL COOKING MODES		
Convection cooking 30 °C - 260 °C	•	•
Mixed steam and convection cooking 35 °C - 260 °C, with STEAM.Maxi™ 30% to 90%	•	•
Mixed humidity and convection cooking 35 °C - 260 °C, with STEAM.Maxi™ 10% to 20%	•	•
Steaming 35 °C - 130 °C with STEAM.Maxi™ technology 100%	•	•
Dry air cooking 30°C - 260 °C with DRY.Maxi™ technology 10% to 100%	•	•
Core probe	-	-
Delta T cooking with core probe	•	•
MULTI.Point core probe (not for XEVC-0311-EPR/ XECC-0523-EPR ovens)	•	•
SOUS-VIDE core probe	0	0
ADVANCED AND AUTOMATIC COOKING PROGRAMMING		
MIND.Maps™ technology: draw cooking processes made of infinite steps with one simple touch	•	•
PROGRAMS: store up to 256 user's programs	•	•
PROGRAMS: possibility to assign a name and picture to the stored programs	•	•
PROGRAMS: save recipe name by writing it (in any language)	•	٠
CHEFUNOX: select cooking mode (roast, braise, girll), food to be cooked, food size and cooking result. and start cooking	•	۲
MULTI.Time: technology to manage up to 10 timers to cook different products at the same time	•	•
MISE.EN.PLACE: technology to sincronize the food loading in the cooking chamber to have every pan ready at the same time	•	•
AIR DISTRIBUTION IN THE COOKING CHAMBER		
AIR.Maxi™ technology: multiple, reversing fans	•	•
AIR.Maxi™ technology: 4 air speeds, programmable	•	•
AIR.Maxi™ technology: 4 semi static cooking modes, programmable	•	•
CLIMA MANAGEMENT IN THE COOKING CHAMBER		
DRY.Maxi™ technology: high performance moisture and humidity extraction, programmable by the user	•	•
DRY.Maxi™ technology: cooking with humidity extraction 30 - 260 °C	•	
STEAM.Maxi™ technology: steaming 35 °C - 130 °C	•	•
STEAM.Maxi™ technology: combination of moist air and dry air 35 °C- 260 °C	•	•
ADAPTIVE.Cooking [™] technology: identifies cooking process optimization and automatically adjusts cooking parameters to grant perfect cooking results (not for XECC-0523-EPR oven)	•	•
ADAPTIVE.Cooking™ technology: one pan or full load, same result (not for XECC-0523-EPR oven)	•	•
ADAPTIVE.Cooking™ technology: humidity sensor and automatic adjustment (not for XECC-0523-EPR oven)	•	•
DOUBLE STACK COLUMN		
MAXI.LINK technology: allows double-stack oven columns to be created	•	•

THERMAL INSULATION AND SAFETY
Protek.SAFE™ technology: maximum thermal efficiency and working safety (external surface temp
Protek.SAFE™ technology: fan impeller brake to contain energy loss at door opening
Protek.SAFE [™] technology: electrical power absorbtion related to the real needs
Protek.SAFE [™] technology: gas power absorbtion related to the real needs
Protek.SAFE [™] PLUS: triple glazed door (not for XEVC-0311-EPR/ XECC-0523-EPR ovens)
HIGH PERFORMANCE PRESSURE BURNER
Spido.GAS [™] technology: suitable for G20 / G25 / G25.1 / G30 / G31 gas types
Spido.GAS [™] technology: high performance straight heat exchanger pipes for a symmetric heat of
Spido.GAS™ technology: straight heat exchanger pipes for an easy service
AUTOMATIC CLEANING
Rotor.KLEAN™: 4 automatic washing programs (with detergent and water presence control*) *excl
Rotor.KLEAN™ : detergent tank integrated in the oven
PATENTED DOOR
Door hinges made of high durability and self-lubricating techno-polymer
Reversible door, even after the installation
Door docking positions at 60°-120°-180°
AUXILIARY FUNCTIONS
Preheating temperature up to 260 °C
Visualisation of the residual cooking time (when cooking not using the core probe)
Holding cooking mode «HOLD»
Continuous functioning «INF»
Visualisation of the set and real values of time, core probe temperature, cavity temperature, hun
Temperature unit in °C or °F
TECHNICAL DETAILS
Rounded stainless steel (AISI 304) cavity for hygiene and ease of cleaning
Chamber lighting through external LED lights
Steam proof sealed MASTER.Touch control panel
High-durability carbon fibre door lock
Door drip pan with continuous drainage, even when the door is open
High capacity appliance drip pan
Light weight – heavy duty structure using innovative materials
Proximity door contact switch
2-stage safety door lock
Autodiagnosis system for problems or brake down
Safety temperature switch
Openable internal glass to simplify door cleaning
Stainless steel C-shaped rack rails with notched recesses for easy loading

CE



EHE



	COMPACT GN 1/1		GN 2/3	
C-0311-EPR	XECC-1013-EPR	XECC-0513-EPR	XECC-0523-EPR	
N 1/1	10 GN 1/1	5 GN 1/1	5 GN 2/3	
mm	67 mm	67 mm	67 mm	
/ 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	
V ~ 1N/ 400 V ~ 3N	400 V ~ 3N	400 V ~ 3N	230 V ~ 1N/ 400 V ~ 3N	
W	18,5 kW	9,2 kW	5,2 kW	
)x773x538	535x862x984	535x862x649	535x662x649	
kg	90 kg	65 kg	55 kg	

		0
	ELECTRIC	GAS
perature complies with the IEC/EN60335-2-42 rule)	•	•
	•	•
	•	_
	_	٠
	•	٠
	_	•
listribution	_	٠
		٠
uding the ovens XEVC-0311-EPR/ XECC-0523-EPR	•	•
	•	٠
	•	•
	0	0
	٠	٠
	•	•
	•	•
	•	•
		•
nidity, fan speed	•	•
	•	•
	•	•
	•	•
	•	•
	•	•
	•	•
	•	•
	•	•
	•	•
	0	0
	•	•
	•	•
	•	•
	•	•

ACCESSORIES

Ask for more.

HOODS



HOOD WITH STEAM CONDENSER FOR GN 2/1 ELECTRIC OVENS

Voltage: 230 V~ 1N - Frequency: 50 / 60 Hz Electrical power: 100 W Exhaust chimney diameter: 121 mm Min. air flow: 310 m3/h - Max. air flow: 390 m3/h Dimensions: 868x1323x240 WxDxH mm Art.: XEVHC-HC21

HOOD WITH STEAM CONDENSER FOR 20 GN 1/1 ELECTRIC OVENS Voltage: 230 V~ 1N - Frequency: 50 / 60 Hz Electrical power: 100 W

Exhaust chimney diameter: 121 mm Min. air flow: 310 m3/h - Max. air flow: 390 m3/h Dimensions: 868x1159x240 WxDxH mm Art.: XEAHC-HCFL

SLOWTOP



NEUTRAL CABINET



STANDS



SMART.DRAIN

HOOD WITH STEAM CONDENSER FOR

GN 1/1 ELECTRIC OVENS Voltage: 230 V~ 1N - Frequency: 50 / 60 Hz Electrical power: 100 W Exhaust chimney diameter: 121 mm Min. air flow: 310 m3/h - Max. air flow: 390 m3/h Dimensions: 750x956x240 WxDxH mm Art.: XEVHC-HC11

HOOD WITH STEAM CONDENSER FOR

GN 1/1 COMPACT OVENS Voltage: 230 V~ 1N - Frequency: 50 / 60 Hz Electrical power: 100 W - Exhaust chimney diameter: 121 mm Min. air flow: 310 m3/h - Max. air flow: 390 m3/h Dimensions: 535x1100x240 WxDxH mm Art.: XECHC-HC13

HOOD WITH STEAM CONDENSER FOR **GN 2/3 COMPACT OVENS**

Compatible with: XECC-0523-EPR Voltage: 230 V~ 1N - Frequency: 50 / 60 Hz Electrical power: 100 W Exhaust chimney diameter: 121 mm Min. air flow: 310 m3/h - Max. air flow: 390 m3/h Dimensions: 535x900x240 WxDxH mm Art.: XECHC-HC23


ACTIVATED CARBON FILTER FOR HOODS WITH

STEAM CONDENSER Compatible with: XECC-1013-EPR/ XECC-0513-EPR Dimensions: 413x655x108 WxDxH mm - Weight: 11 kg Art.: XUC140

> CARTRIDGE FOR ACTIVATED CARBON FILTER Compatible with: XUC140

Art.: XUC141

QUICK.LOAD & QUICK.PLATE



XEVC-1021-GPR Capacity: 10 GN 2/1 - Pitch: 78 mm Dimensions: 622x674x865 WxDxH mm Art.: XWVBC-1021

Compatible with: XEVC-1021-EPR/

6 GN 2/1 BASKET

10 GN 2/1 BASKET

Compatible with: XEVC-0621-EPR/ XEVC-0621-GPR Capacity: 6 GN 2/1 Pitch: 78 mm Dimensions: 622x674x545 WxDxH mm Art.: XWVBC-0621

QUICK.LOAD FOR 20 GN 2/1 OVENS

Capacity: 20 GN 2/1 Pitch: 67 mm Dimensions: 743x783x1717 WxDxH mm Weight: 72 Kg Art.: XEVTC-2021

QUICK.LOAD FOR 20 GN 1/1 OVENS

DET&Rinse"

Art.: DB1018

Double concentrate

oven detergent

Art.: DB1015

DET&Rinse

PLUS

detergent & rinsing agent

traditional oven detergent One box contains n° 10 x 1 litre tanks.

ECO

Capacity: 20 GN 1/1 - Pitch: 66 mm Dimensions: 743x564x1700 WxDxH mm Weight: 25 Kg Art.: XEVTC-2011

ECO friendly double concentrate

10 It of DET&Rinse[™] ECO = 18 It of

UNOX.CARE





FOR OVENS CHEFTOP MIND.Maps[™] PLUS The XUC090 is compatible only with CHEFTOP MIND.Maps[™] PLUS ovens set up for its usage. The compatibility of the Hyper.Smoker is guaranteed for all electric ovens produced starting from 15th June 2016 and for all gas

One box contains nº 10 x 1 litre tanks.

produced starting from 5th August 2016. It is necessary to check the compatibility with models which have been produced earlier. Art.: XUC090

INTERNET CONNECTION

OPTIONALS FOR INTERNET CONNECTION FOR CHEFTOP MIND.Maps[™] PLUS OVENS

WiFi connection kit 3G connection kit







40

SLOWTOP Compatible with GN 1/1 counter-top ovens Capacity: 7 GN 1/1 Pitch: 70 mm Voltage: 230 V~ 1N Frequency: 50 / 60 Hz Electrical power: 3,2 kW Max, temperature: 180 °C Dimensions: 750x792x961 WxDxH mm Weight: 63 kg Art. XEVSC-0711-CR

> 2 wheels with brake - 2 wheels without brake. Compatible with: XWVEC-0821/ XWVEC-0811 Art.: XUC010

NEUTRAL CABINET FOR GN 1/1 OVENS Capacity: 8 GN 1/1

Capacity: 8 GN 2/1

Art.: XWVEC-0821

Pitch: 57 mm

Weight: 30 kg

Pitch: 57 mm Dimensions: 750x656x676 WxDxH mm Weight: 18 kg Art.: XWVEC-0811

HIGH OPEN STAND FOR GN 2/1 OVENS Dimensions: 842x864x692 WxDxH mm Weight: 12 Kg Art.: XWVRC-0021-H

HIGH OPEN STAND FOR GN 1/1 OVENS Dimensions: 732x546x752 WxDxH mm Weight: 10 Kg Art.: XWVRC-0011-H

INTERMEDIATE OPEN STAND FOR GN 1/1 OVENS Dimensions: 732x546x462 WxDxH mm Weight: 9 Kg Art.: XWVRC-0011-M

LOW OPEN STAND FOR GN 2/1 OVENS mensions: 842x891x305 WxDxH mm Art.: XWVRC-0021-L

LOW OPEN STAND FOR GN 1/1 OVENS nensions: 732x546x305 WxDxH mm Art.: XWVRC-0011-L

FLOOR POSITIONING STAND FOR GN 2/1 OVENS Dimensions: 842x891x113 WxDxH mm Art.: XWVRC-0021-F

FLOOR POSITIONING STAND FOR GN 1/1 OVENS Dimensions: 732x546x113 WxDxH mm Weight: 9 Kg

SMART, DRAIN (COOKING FAT AND LIQUID COLLECTION SYSTEM)

Compatible with XWVEC-0821/ XWVRC-0021-H/ XWVEC-0811/ XWVRC-0011-H Art.: XUC020

See UNOX SMART.DRAIN suggested solutions (OPEN, CLOSED, TROLLEY) page 29

SMART, DRAIN manual kit for neutral cabinet and high open stand

Art.: XWVRC-0011-F

WHEELS KIT WITH SAFETY CHAINS **4 WHEELS COMPLETE KIT:** 2 wheels with brake - 2 wheels without brake. Compatible with:

XWVEC-0821/ XWVRC-0021-F/ XWVRC-0021-L/ XWVRC-0021-H/ XWVEC-0811/ XWVRC-0011-F/ XWVRC-0011-L/ XWVRC-0011-M/ XWVRC-0011-H Art.: XUC010



Illustrative photo refers to XEC006 kit

HYPER.SMOKER

NEUTRAL CABINET FOR GN 2/1 OVENS WHEELS KIT WITH SAFETY CHAINS **4 WHEELS COMPLETE KIT:** Dimensions: 860x1079x717 WxDxH mm

10 GN 1/1 BASKET

Compatible with: XEVC-1011-EPR/ XEVC-1011-GPR Capacity: 9 GN 1/1 Pitch: 67 mm Dimensions:568x361x693 WxDxHmm Weight: 7 kg Art.: XWVBC-0911

6 GN 1/1 BASKET

Compatible with: XEVC-0711-EPR/ XEVC-0711-GPR Capacity: 6 GN 1/1 Pitch: 76 mm Dimensions: 568x361x546 WxDxH mm Weight: 5 kg Art.: XWVBC-0611

QUICK.PLATE FOR 20 GN 2/1 OVENS

Capacity: 102 dishes Max. dishes diameter: 310 mm Min. dishes diameter: 210 mm Dimensions: 743x784x1711 WxDxH mm Weight: 65 Kg Art.: XEVTC-102P

QUICK.PLATE FOR 20 GN 1/1 OVENS

Capacity: 51 dishes Max. dishes diameter: 310 mm Min. dishes diameter: 210 mm Dimensions: 743x564x1711 WxDxH mm Weight: 40 Kg Art.: XEVTC-051P

TROLLEY FOR GN 2/1 BASKETS

Compatible with: XWVBC-1021/ XWVBC-0621 Dimensions: 647x855x923 WxDxH mm Weight: 32 Kg Art.: XWVYC-0021

TROLLEY COUPLING KIT

Required article with the purchase of XWVYC-0021. The kit is made of a coupling system to attach trolley with XWVEC-0821/ XWVRC-0021-H Art.: XWVYC-CK21

TROLLEY FOR GN 1/1 BASKETS

Compatible with: XWVBC-0911/ XWVBC-0611 Dimensions: 605x700x923 WxDxH mm Weight: 27 Kg Art.: XWVYC-0011

AUTO.Lock COUPLING KIT

Required article with the purchase of XWVYC-0011. The kit is made of a coupling system to attach trolley with XWVEC-0811/ XWVRC-0011-H Art.: XWVYC-CK11

THERMOCOVER COMPATIBLE WITH: XEVTC-2021/ XEVTC-102P Art.: XUC031

COMPATIBLE WITH: XEVTC-2011/ XEVTC-051 Art.: XUC030

UNOX.PURE Art.: XHC003

UNOX.PURE.RO **REVERSE OSMOSIS**

Voltage: 230 V~ 1N 10 It of DET&Rinse[™] PLUS = 18 It of traditional Frequency: 50 / 60 Hz Electrical power: 230 W Dimensions: 230x540x445 WxDxH mm Weight: 16 Kg Art.: XHC002

> Art.: XEC006 Art.: XEC007

Like having an extra member of the brigade

FORO.BLACK



Art.: TG 890 Art.: TG 730

Art.: TG 520

Art.: TG 875

Art.: TG 870

Art.: GRP 815

Art.: GRP 710

Art.: GRP 575

Art.: TG 715 (Pizza)

AVAILABLE IN SIZES: > GN 1/1 > GN 2/3

> FULL SIZE

FAKIRO[™]



AVAILABLE IN SIZES:

> GN 1/1 > GN 2/3

FAKIRO[™] GRILL



AVAILABLE IN SIZES:

STEAM&FRY

AVAILABLE IN SIZES:


> GN 1/1

> GN 2/3

> FULL SIZE

> GN 1/1






 AVAILABLE IN SIZES:

 > GN 1/1
 Art.: TG885

 > GN 2/3
 Art.: TG720

 > FULL SIZE
 Art.: TG530


POLLO.BLACK



AVAILABLE IN SIZES:

> GN 1/1 Art.: GRP 825 (capacity 8 chickens) > GN 2/3 Art.: GRP 715 (capacity 4 chickens) > FULL SIZE Art.: GRP 570 (capacity 10 chickens)


POLLO.GRILL



Art.: GRP 840

AVAILABLE IN SIZES: > GN 1/1





AVAILABLE IN SIZES:

> GN 1/1

Art.: TG 945



 AVAILABLE IN SIZES:

 > GN 1/1
 Art.: TG 895

BLACK.40



 AVAILABLE IN SIZES:

 > GN 1/1
 Art.: TG 900

PAN.FRY



Art.: TG. 905 Art.: TG. 735

AVAILABLE IN SIZES:

> GN 1/1 > GN 2/3

EGGX



AVAILABLE IN SIZES:

> GN 1/1 Art.: TG 935



Spare parts 4 years / 10.000 hours optional warranty

Unox offers you the possibility of extending the guarantee on spare parts up to 4 years or 10.000 hours on-time. This is the LONG.Life4 program, tangible proof of the quality and reliability of CHEFTOP MIND.Maps[™] PLUS ovens.

Activation of the LONG.Life4 guarantee is simple.

CHEFTOP MIND.Maps[™] PLUS models are ready prepared for internet connection (Ethernet) and allow you to register directly from the control panel. Kits for WiFi or 3G connection are available.

(find out more at www.unox.com, conditions apply).

OPTIONALS FOR INTERNET CONNECTION FOR CHEFTOP MIND.MAPS™ PLUS OVENS

Art.: XEC006	WiFi connection kit
Art.: XEC007	3G connection kit







INTERNATIONAL

UNOX S.p.A. Via Majorana 22 / 35010 Cadoneghe (PD) Italy Tel +39 049 8657511 / Fax +39 049 8657555 **info@unox.com**

EUROPE

ITALIA UNOX S.p.A. E-mail: info@unox.it Tel.: +39 049 86 57 511

ČESKÁ REPUBLIKA UNOX DISTRIBUTION s.r.o. E-mail: info.cz@unox.com Tel.: +420 241 940 000

РОССИЯ, ПРИБАЛТИКА И СТРАНЫ СНГ UNOX РОССИЯ E-mail: info.ru@unox.com Tel.: +7 (499) 702-00-14

ESPAÑA UNOX PROFESIONAL ESPAÑA S.L. E-mail: info.es@unox.com Tel.: +34 900 82 89 43

SCANDINAVIAN COUNTRIES UNOX SCANDINAVIA AB E-mail: info.se@unox.com Tel.: +46 (0)768 716 422

UNITED KINGDOM UNOX UK Ltd. E-mail: info@unoxuk.com Tel.: +44 1252 851 522

PORTUGAL UNOX PORTUGAL E-mail: info.pt@unox.com Tel.: +351 918 228 787 DEUTSCHLAND UNOX DEUTSCHLAND GmbH E-mail: info.de@unox.com Tel.: +49 2951 98760

FRANCE, BELGIUM & LUXEMBOURG UNOX FRANCE s.a.s. E-mail: info@unox.fr Tel.: +33 4 78 17 35 39

ÖSTERREICH UNOX ÖSTERREICH GmbH E-mail: bestellung@unox.com Tel. +43 800 880 963

HRVATSKA UNOX CROATIA E-mail: narudzbe@unox.com Tel.: +39 049 86 57 538

TÜRKİYE UNOX TURKEY Profesyonel Mutfak Ekipmanları Endüstri ve Ticaret Limited Şirketi E-mail: info.tr@unox.com Tel.: +90 530 176 62 03

IRELAND UNOX IRELAND E-mail: info.ie@unox.com Tel. +353 (0) 87 32 23 218

БЪЛГАРИЯ UNOX BULGARIA E-mail: info.bg@unox.com Tel.: +359 88 23 13 378

ASIA & AFRICA

MALAYSIA & SINGAPORE UNOX (ASIA) SDN. BHD E-mail: info.asia@unox.com Tel.: +603-58797700

OTHER ASIAN COUNTRIES UNOX (ASIA) SDN. BHD E-mail: info.asia@unox.com Tel.: +603-58797700

PHILIPPINES UNOX PHILIPPINES E-mail: info.asia@unox.com Tel.: +63 9173108084

대한민국 UNOX KOREA CO. Ltd. 이메일: info.asia@unox.com 전화: +82 2 69410351

AMERICA & OCEANIA

U.S.A. & CANADA UNOX Inc. E-mail: infousa@unox.com Tel.: +1 800 489 8669

MEXICO UNOX MEXICO, S. DE R.L. DE C.V. E-mail: info.mx@unox.com Tel.: +52 1555 4314 180

BRAZIL UNOX BRAZIL E-mail: info.br@unox.com Tel.: +55 11 98717-8201 U.A.E. UNOX MIDDLE EAST DMCC E-mail: info.uae@unox.com Tel.: +971 55 426 3167

INVENTIVE SIMPLIFICATION

SOUTH AFRICA UNOX SOUTH AFRICA E-mail: info.sa@unox.com Tel.: +27 845 05 52 35

INDONESIA UNOX INDONESIA E-mail: info.asia@unox.com Tel.: +62 81908852999

中华人民共和国 UNOX TRADING (SHANGHAI) CO. Ltd. 电子邮件: info.china@unox.com 电话: +86 21 56907696

COLOMBIA UNOX COLOMBIA E-mail: info.co@unox.com Tel.: +57 350 65 88 204

AUSTRALIA UNOX AUSTRALIA PTY Ltd. E-mail: info@unoxaustralia.com.au Tel.: +61 3 9876 0803

NEW ZEALAND UNOX NEW ZEALAND Ltd. E-mail: info@unox.co.nz Tel.: +64 (0) 800 76 0803 L11387A0 - Printed: 10-2017 All images used are for illustrative purposes only. All features indicated in this catalogue may be subject to change and could be updated without notice.

UNOX.COM | FOLLOW US ON

in